



2.92mm-1.85mm adapters(DC~40GHz)


Specifications

Impedance: 50Ω
Frequency: DC-40GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	



2.92mm interfaces PER MIL-STD-348A 1.85mm interfaces PER IEC-61169

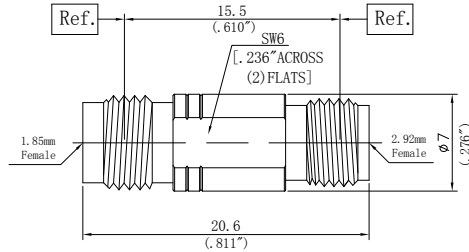


Description	2.92mm (f) to 1.85mm (f)
PN	Z363800Z01
VSWR	DC-40GHz ... 1.20:1 (max)

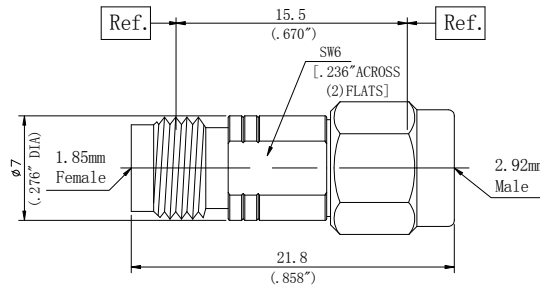

Description	2.92mm (m) to 1.85mm (f)
PN	Z363810Z01
VSWR	DC-40GHz ... 1.15:1 (max)

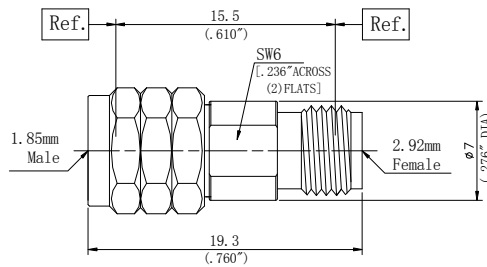

Description	2.92mm (f) to 1.85mm (m)
PN	Z363801Z01
VSWR	DC-40GHz ... 1.15:1 (max)

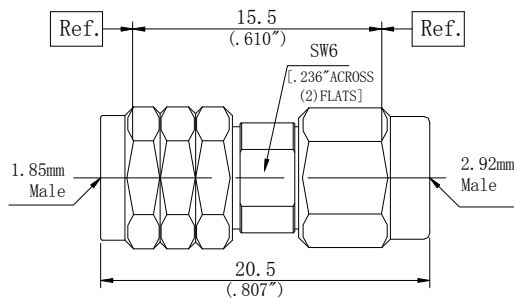

Description	2.92mm (m) to 1.85mm (m)
PN	Z363811Z01
VSWR	DC-40GHz ... 1.15:1 (max)