



APC-7 adapters(DC~18GHz)


Specifications

Impedance: 50Ω
Frequency: DC-18GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


N Interfaces PER MIL-STD-348A
APC-7 Interfaces PER IEC-60457
3.5mm Interfaces PER IEC-60169

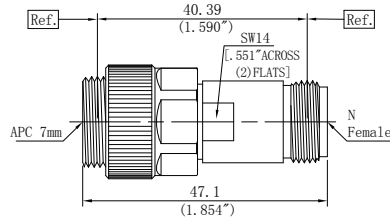


Description	APC-7 to N (f)
PN	Z3334N0Z01
VSWR	DC-18GHz . . . 1.10:1 (max)

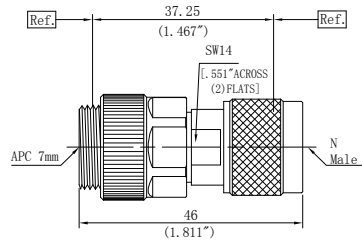

Description	APC-7 to N (m)
PN	Z3334N1Z01
VSWR	DC-18GHz . . . 1.10:1 (max)



Description	APC-7 to 3.5mm (f)
PN	Z3335N0Z01
VSWR	DC-18GHz . . . 1.10:1 (max)

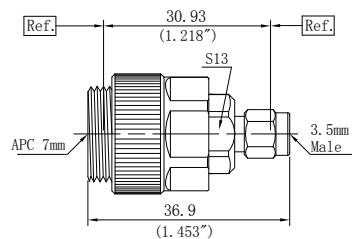

Description	APC-7 to 3.5mm (m)
PN	Z3335N1Z01
VSWR	DC-18GHz . . . 1.10:1 (max)