



Quick Mate Adaptors



Specifications

Impedance: 50Ω

Durability: 500 cycles

Temperature Range: -55°C~+165°C

N/SMA Interfaces PER MIL-STD-348A


Material/Finishing

Housing: Stainless steel SU303 Polished/Passivated


Center contact: Beryllium Copper Gold plated(MIL-G-45204)

Housing: Beryllium copper Gold plated(MIL-G-45204)


Insulators: PEI or PEI&PTFE

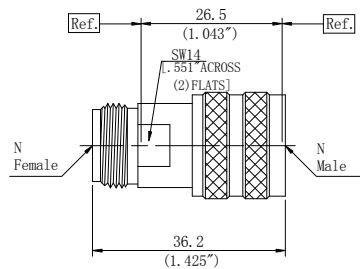

Description	N (m) to N (f)
PN	K343410P01
VSWR	DC-18GHz . . . 1.15:1 (max)



Description	SMA (m) to SMA (f)
PN	K555510P01
VSWR	DC-27GHz . . . 1.20:1 (max)

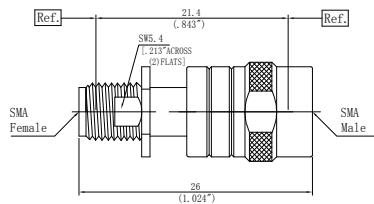

Description	SMA (m) to SMA (f)
PN	K555510S01
VSWR	DC-27GHz . . . 1.25:1 (max)

*Note: P-PUSH ON S-SELF LOCK