



TNC-SMA adapters(DC~11GHz)



Specifications

Impedance: 50Ω
Frequency: DC-11GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


TNC/SMA interfaces PER MIL-STD-348A

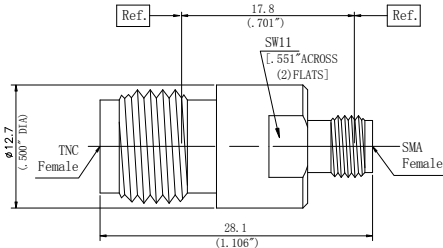


Description	TNC (f) to SMA (f)
PN	Z535500Z01
VSWR	DC-11GHz . . . 1.15:1 (max)

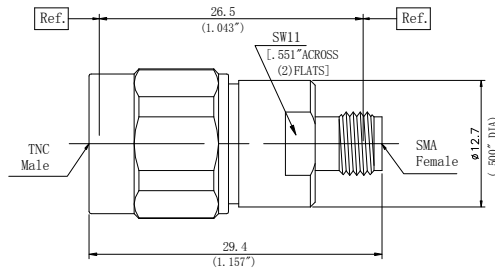

Description	TNC (m) to SMA (f)
PN	Z535510Z01
VSWR	DC-11GHz . . . 1.15:1 (max)

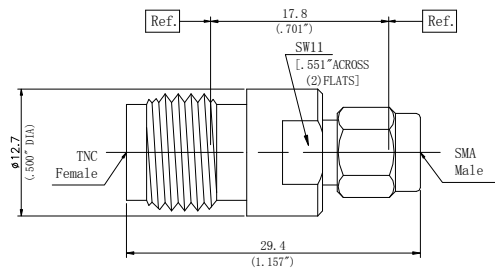

Description	TNC (f) to SMA (m)
PN	Z535501Z01
VSWR	DC-11GHz . . . 1.15:1 (max)

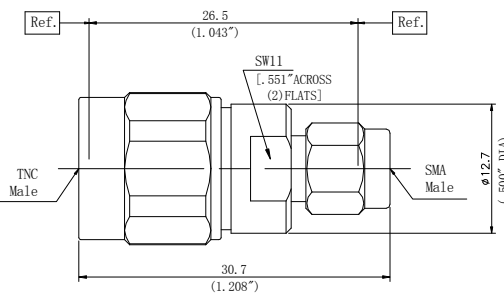

Description	TNC (m) to SMA (m)
PN	Z535511Z01
VSWR	DC-11GHz . . . 1.15:1 (max)