



7mm Series Adapters

Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles



Operating Temperature: -60°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

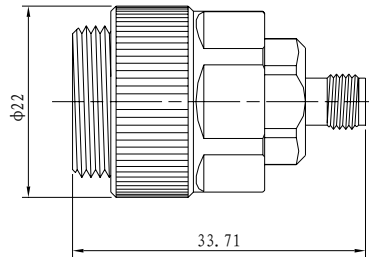


P/N	Z3335N0Z01
Description	7mm-3.5mm(K)
VSWR	DC-18GHz...1.15:1(Max)

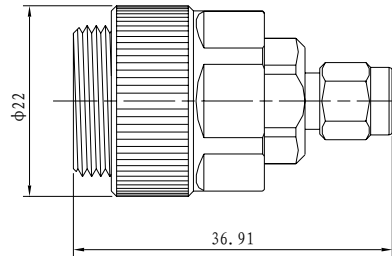

P/N	Z3335N1Z01
Description	7mm-3.5mm(J)
VSWR	DC-18GHz...1.15:1(Max)

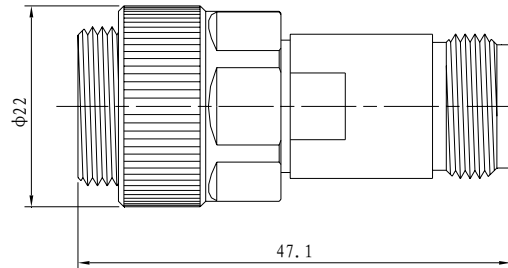

P/N	Z3334N0Z01
Description	7mm-N(K)
VSWR	DC-18GHz...1.15:1(Max)

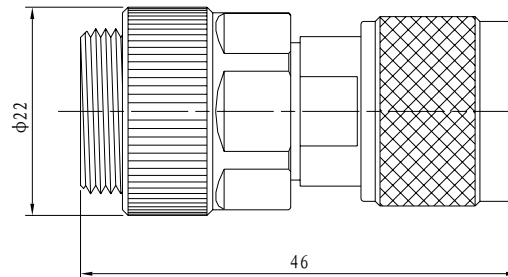

P/N	Z3334N1Z01
Description	7mm-N(J)
VSWR	DC-18GHz...1.15:1(Max)