



## N-3.5mm Between Series Adapters

### Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18GHz

Durability: 500 Cycles


Operating Temperature: -60°C~+165°C

### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

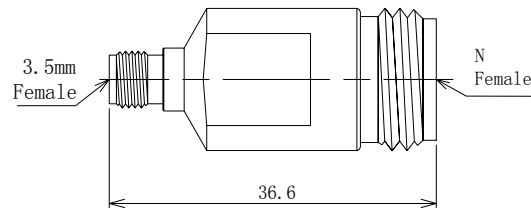


P/N	Z343500Z01
Description	N-3.5mm(KK)
VSWR	DC-18GHz...1.15:1(Max)

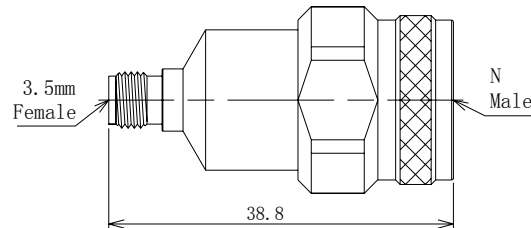

P/N	Z343510Z01
Description	N-3.5mm(JK)
VSWR	DC-18GHz...1.15:1(Max)

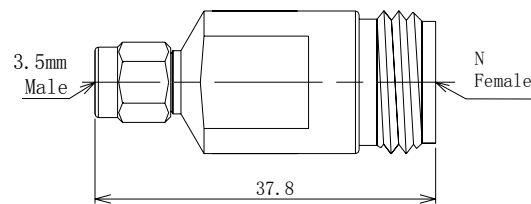

P/N	Z343501Z01
Description	N-3.5mm(KJ)
VSWR	DC-18GHz...1.15:1(Max)

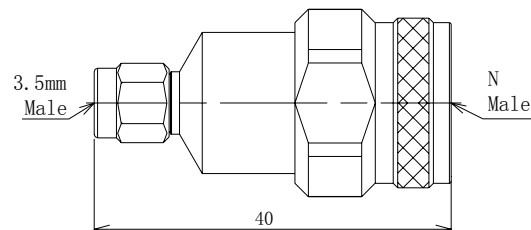

P/N	Z343511Z01
Description	N-3.5mm(JJ)
VSWR	DC-18GHz...1.15:1(Max)