



N-2.92mm Between Series Adapters

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18GHz

Durability: 500 Cycles


Operating Temperature: -60°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

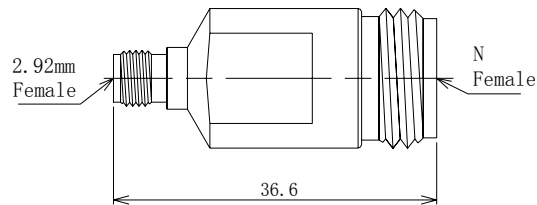


P/N	Z343600Z01
Description	N-2.92mm(KK)
VSWR	DC-18GHz...1.15:1(Max)

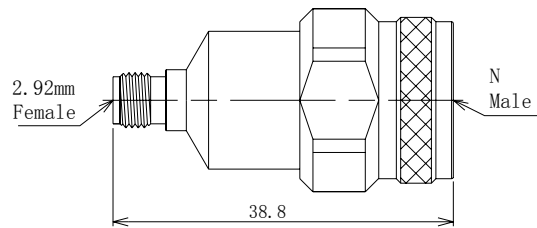

P/N	Z343610Z01
Description	N-2.92mm(JK)
VSWR	DC-18GHz...1.15:1(Max)

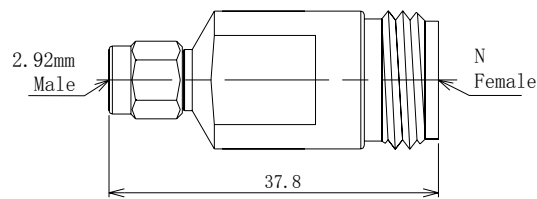

P/N	Z343601Z01
Description	N-2.92mm(KJ)
VSWR	DC-18GHz...1.15:1(Max)

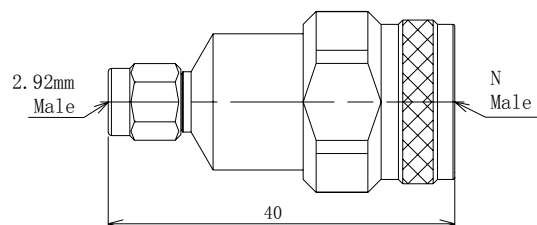

P/N	Z343611Z01
Description	N-2.92mm(JJ)
VSWR	DC-18GHz...1.15:1(Max)