




N-TNC Between Series Adapters

Performance Features


Nominal Impedance: 50Ω
 Frequency Range: DC-18GHz
 Durability: 500 Cycles
 Operating Temperature: -50°C~+125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated
 Center Contact: Beryllium Copper Plated Gold
 Insulators: PEI&PTFE

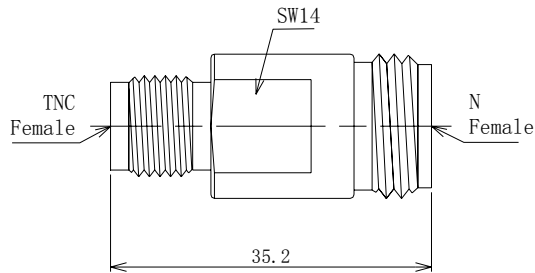


P/N	Z345400Z01
Description	N-TNC(KK)
VSWR	DC-18GHz...1.15:1(Max)

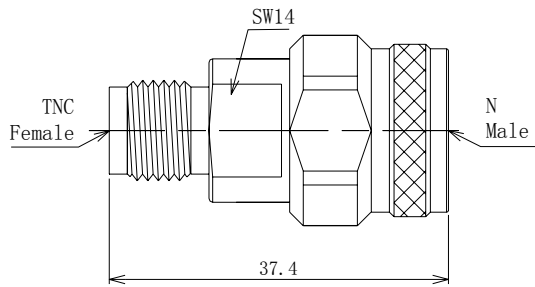

P/N	Z345410Z01
Description	N-TNC(JK)
VSWR	DC-18GHz...1.15:1(Max)

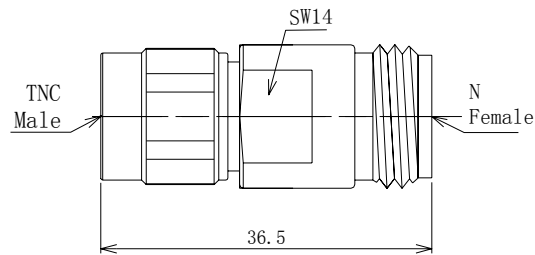

P/N	Z345401Z01
Description	N-TNC(KJ)
VSWR	DC-18GHz...1.15:1(Max)

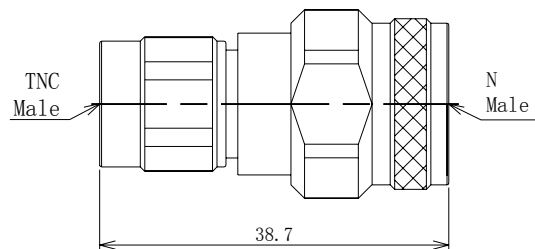

P/N	Z345411Z01
Description	N-TNC(JJ)
VSWR	DC-18GHz...1.15:1(Max)