




N-SMA Between Series Adapters

Performance Features


Nominal Impedance: 50Ω
 Frequency Range: DC-18GHz
 Durability: 500 Cycles
 Operating Temperature: -60°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated
 Center Contact: Beryllium Copper Plated Gold
 Insulators: PEI&PTFE

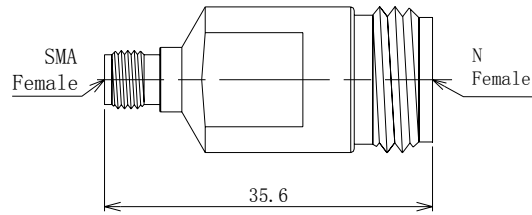


P/N	Z345500Z01
Description	N-SMA(KK)
VSWR	DC-18GHz...1.15:1(Max)

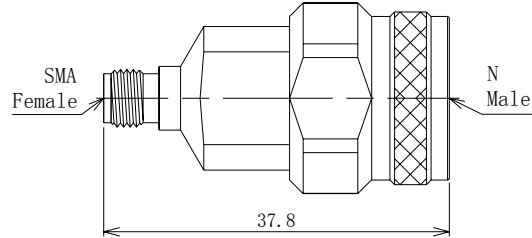


P/N	Z345510Z01
Description	N-SMA(JK)
VSWR	DC-18GHz...1.15:1(Max)

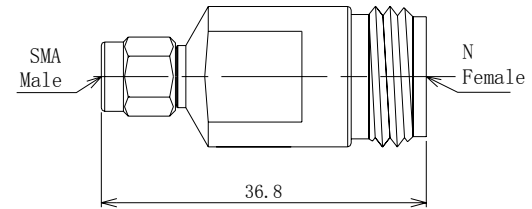

P/N	Z345501Z01
Description	N-SMA(KJ)
VSWR	DC-18GHz...1.15:1(Max)

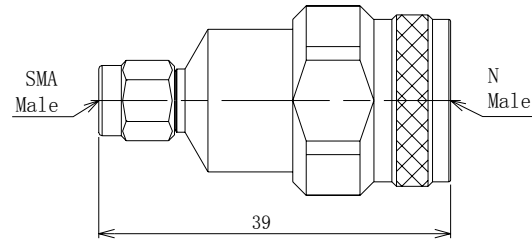

P/N	Z345511Z01
Description	N-SMA(JJ)
VSWR	DC-18GHz...1.15:1(Max)

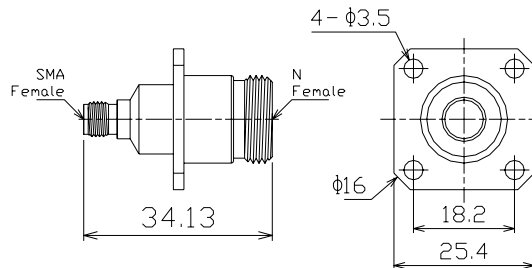

P/N	Z345500F01
Description	N-SMA(KK)
VSWR	DC-18GHz...1.15:1(Max)