




### 3.5mm-2.92mm Between Series Adapters

#### Performance Features


Nominal Impedance: 50Ω  
 Frequency Range: DC-33GHz  
 Durability: 500 Cycles  
 Operating Temperature: -60°C ~ +165°C

#### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated  
 Center Contact: Beryllium Copper Plated Gold  
 Insulators: PEI

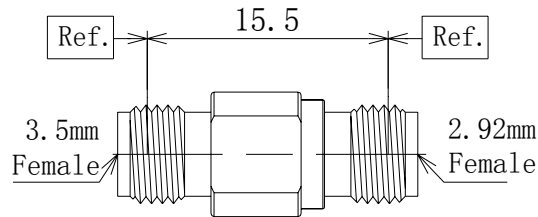


P/N	Z353600Z01
Description	3.5mm-2.92mm(KK)
VSWR	DC-33GHz...1.15:1(Max)

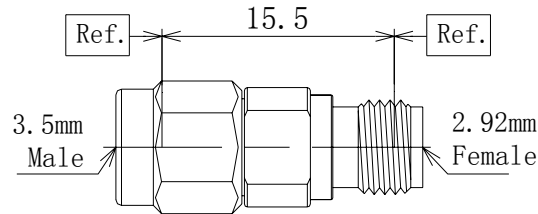


P/N	Z353610Z01
Description	3.5mm-2.92mm(JK)
VSWR	DC-33GHz...1.15:1(Max)

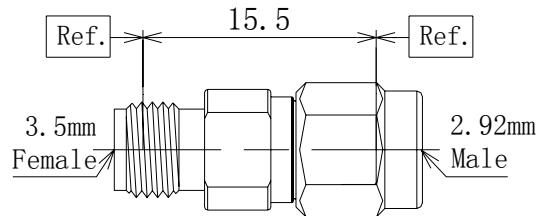

P/N	Z353601Z01
Description	3.5mm-2.92mm(KJ)
VSWR	DC-33GHz...1.15:1(Max)

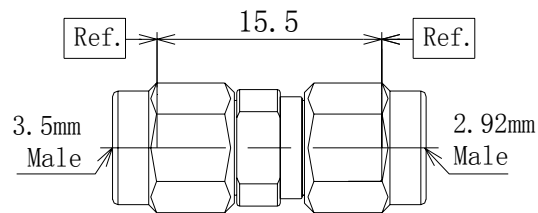

P/N	Z353611Z01
Description	3.5mm-2.92mm(JJ)
VSWR	DC-33GHz...1.15:1(Max)

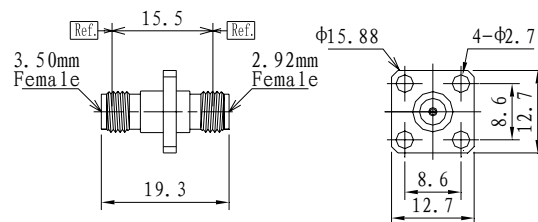

P/N	Z353600F01
Description	3.5mm-2.92mm(KK)
VSWR	DC-33GHz...1.15:1(Max)