



### 3.5mm-2.4mm Between Series Adapters

#### Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-33GHz

Durability: 500 Cycles


Operating Temperature: -60°C~+165°C

#### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

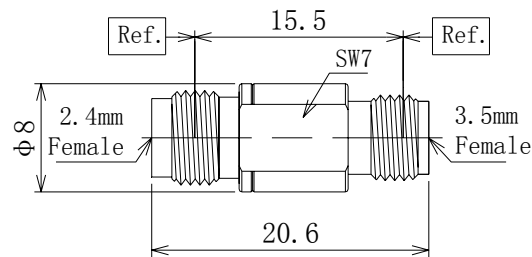


P/N	Z353700Z01
Description	3.5mm-2.4mm(KK)
VSWR	DC-33GHz...1.15:1(Max)

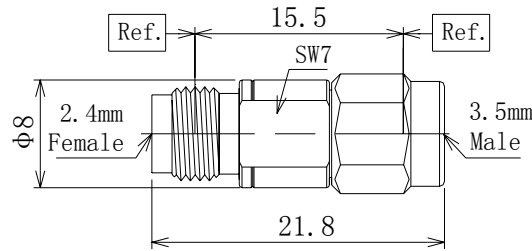

P/N	Z353710Z01
Description	3.5mm-2.4mm(JK)
VSWR	DC-33GHz...1.15:1(Max)

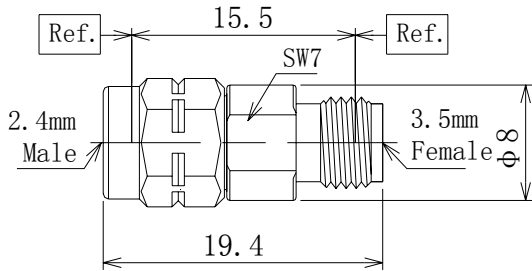

P/N	Z353701Z01
Description	3.5mm-2.4mm(KJ)
VSWR	DC-33GHz...1.15:1(Max)

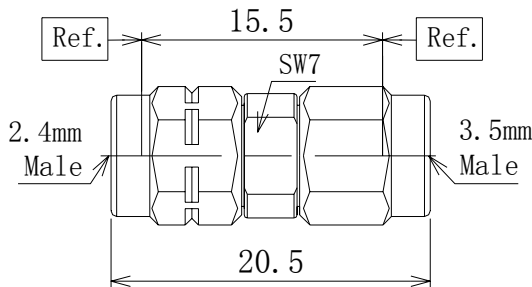

P/N	Z353711Z01
Description	3.5mm-2.4mm(JJ)
VSWR	DC-33GHz...1.15:1(Max)