




2.92mm In-Series Adapters

Performance Features


Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
Durability: 500 Cycles
Operating Temperature: -60°C ~ +165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI

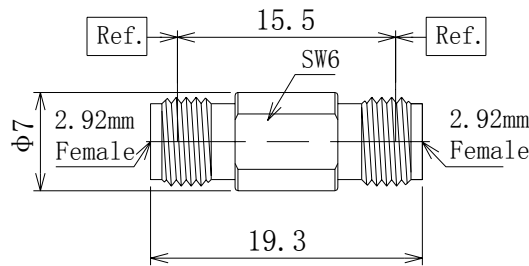


P/N	Z363600Z01
Description	2.92mm-2.92mm(KK)
VSWR	DC-40GHz...1.20:1(Max)

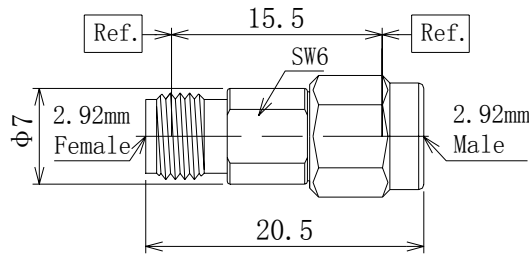

P/N	Z363610Z01
Description	2.92mm-2.92mm(JK)
VSWR	DC-40GHz...1.15:1(Max)

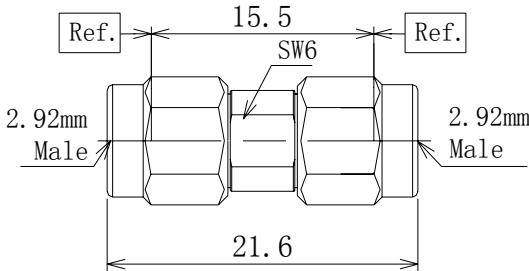

P/N	Z363611Z01
Description	2.92mm-2.92mm(JJ)
VSWR	DC-40GHz...1.15:1(Max)

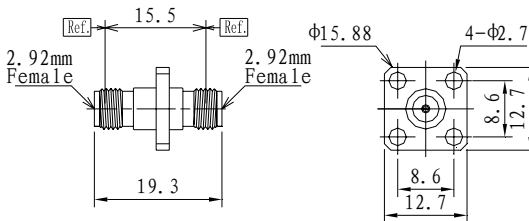

P/N	Z363600F01
Description	2.92mm-2.92mm(KK)
VSWR	DC-40GHz...1.20:1(Max)