



## 2.92mm-2.4mm Between Series Adapters

### Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-40GHz

Durability: 500 Cycles


Operating Temperature: -60°C ~ +165°C

### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI

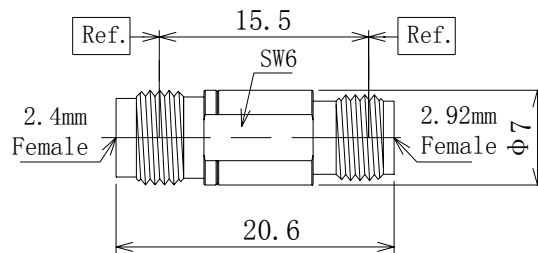


P/N	Z363700Z01
Description	2.92mm-2.4mm(KK)
VSWR	DC-40GHz...1.20:1(Max)

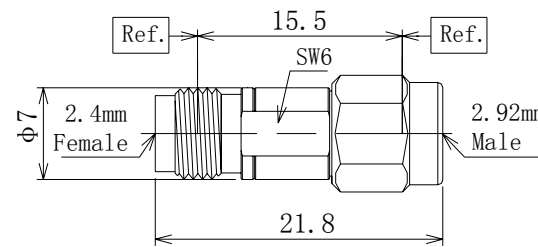

P/N	Z363710Z01
Description	2.92mm-2.4mm(JK)
VSWR	DC-40GHz...1.15:1(Max)

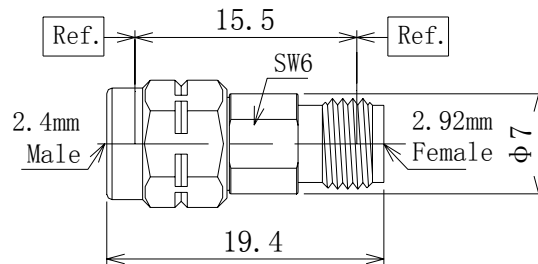

P/N	Z363701Z01
Description	2.92mm-2.4mm(KJ)
VSWR	DC-40GHz...1.15:1(Max)

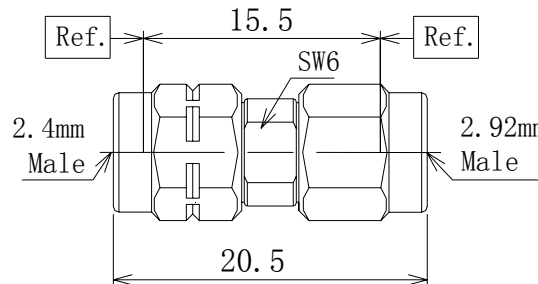

P/N	Z363711Z01
Description	2.92mm-2.4mm(JJ)
VSWR	DC-40GHz...1.15:1(Max)