




2.92mm-SMA Between Series Adapters

Performance Features


Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
Durability: 500 Cycles
Operating Temperature: -50°C~+125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI&PTFE

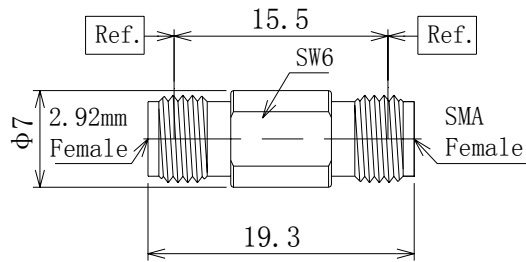


P/N	Z365500Z01
Description	2.92mm-SMA(KK)
VSWR	DC-27GHz...1.15:1(Max)

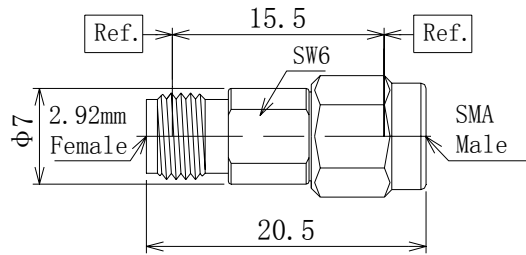

P/N	Z365510Z01
Description	2.92mm-SMA(JK)
VSWR	DC-27GHz...1.15:1(Max)

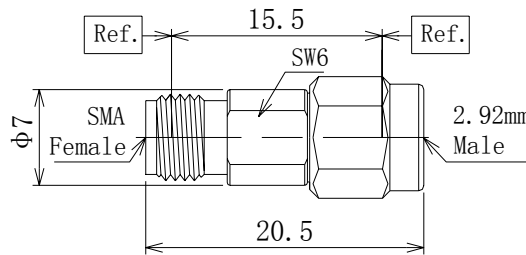

P/N	Z365501Z01
Description	2.92mm-SMA(KJ)
VSWR	DC-27GHz...1.15:1(Max)

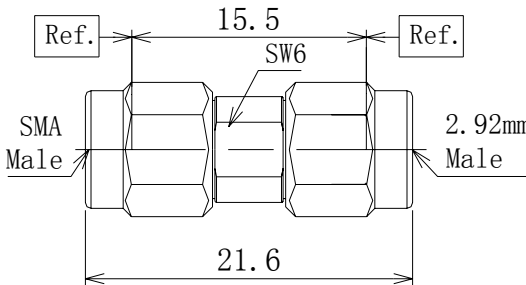

P/N	Z365511Z01
Description	2.92mm-SMA(JJ)
VSWR	DC-27GHz...1.15:1(Max)