




2.4mm In-Series Adapters

Performance Features


Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
Durability: 500 Cycles
Operating Temperature: -60°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated
Center Contact: Beryllium Copper Plated Gold
Insulators: PEI

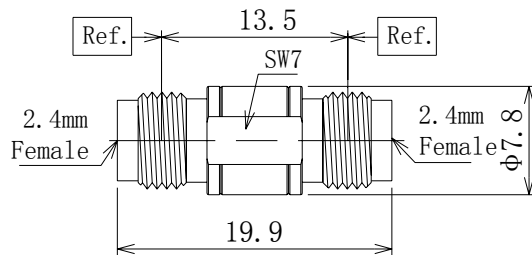


P/N	Z373700Z01
Description	2.4mm-2.4mm(KK)
VSWR	DC-50GHz...1.20:1(Max)

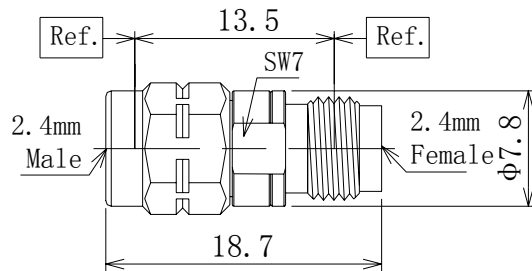

P/N	Z373710Z01
Description	2.4mm-2.4mm(JK)
VSWR	DC-50GHz...1.15:1(Max)

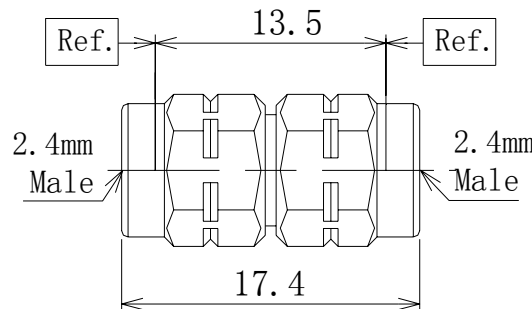

P/N	Z373700Z01
Description	2.4mm-2.4mm(JJ)
VSWR	DC-50GHz...1.15:1(Max)

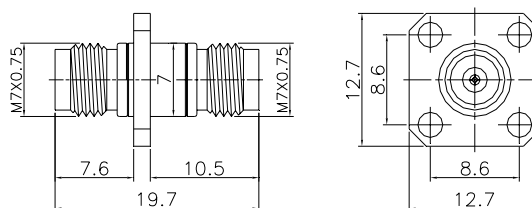

P/N	Z373700F01
Description	2.4mm-2.4mm(KK)
VSWR	DC-50GHz...1.20:1(Max)