



2.4mm-SMA Between Series Adapters

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-27GHz

Durability: 500 Cycles


Operating Temperature: -50°C ~ +125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

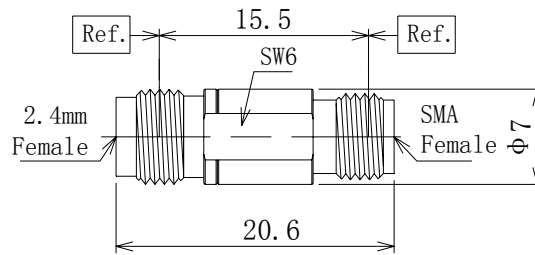


P/N	Z375500Z01
Description	2.4mm-SMA(KK)
VSWR	DC-27GHz...1.15:1(Max)

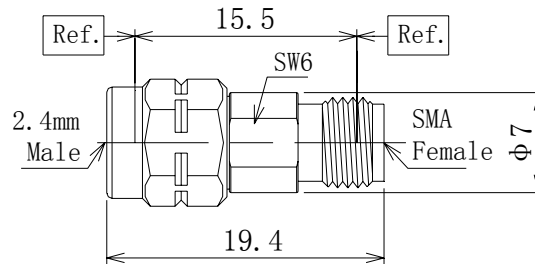

P/N	Z375510Z01
Description	2.4mm-SMA(JK)
VSWR	DC-27GHz...1.15:1(Max)

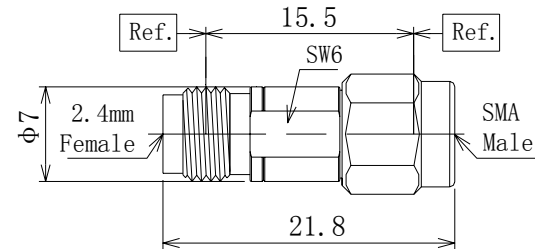

P/N	Z375501Z01
Description	2.4mm-SMA(KJ)
VSWR	DC-27GHz...1.15:1(Max)

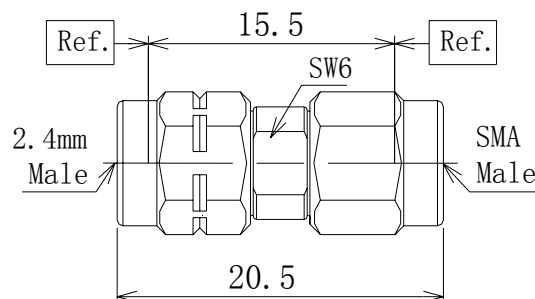

P/N	Z375511Z01
Description	2.4mm-SMA(JJ)
VSWR	DC-27GHz...1.15:1(Max)