



## TNC-SMA Between Series Adapters

### Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-18GHz

Durability: 500 Cycles


Operating Temperature: -50°C~+125°C

### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

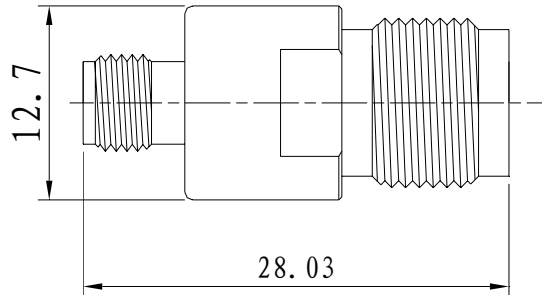


|             |                        |
|-------------|------------------------|
| P/N         | Z545500Z01             |
| Description | TNC-SMA(KK)            |
| VSWR        | DC-18GHz...1.15:1(Max) |

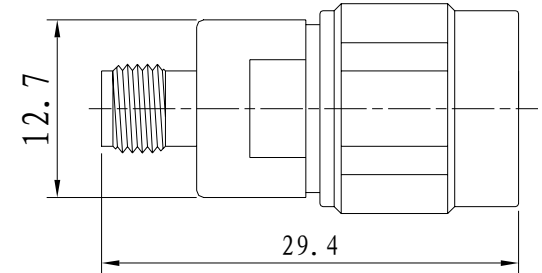

|             |                        |
|-------------|------------------------|
| P/N         | Z545510Z01             |
| Description | TNC-SMA(JK)            |
| VSWR        | DC-18GHz...1.15:1(Max) |

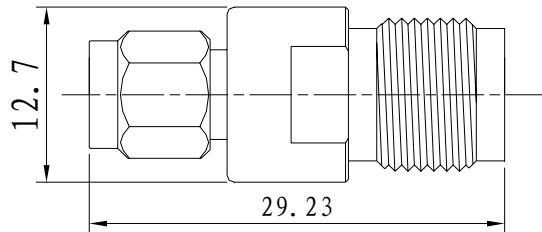

|             |                        |
|-------------|------------------------|
| P/N         | Z545501Z01             |
| Description | TNC-SMA(KJ)            |
| VSWR        | DC-18GHz...1.15:1(Max) |

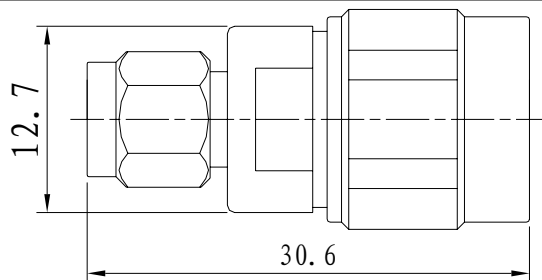

|             |                        |
|-------------|------------------------|
| P/N         | Z545511Z01             |
| Description | TNC-SMA(JJ)            |
| VSWR        | DC-18GHz...1.15:1(Max) |