



SMA In-Series Adapters

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-27GHz

Durability: 500 Cycles


Operating Temperature: -50°C~+125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

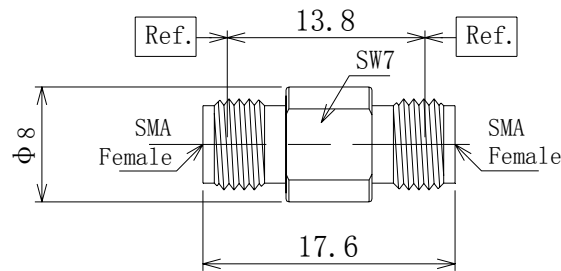

P/N	Z555500Z01
Description	SMA-SMA(KK)
VSWR	DC-27GHz...1.15:1(Max)

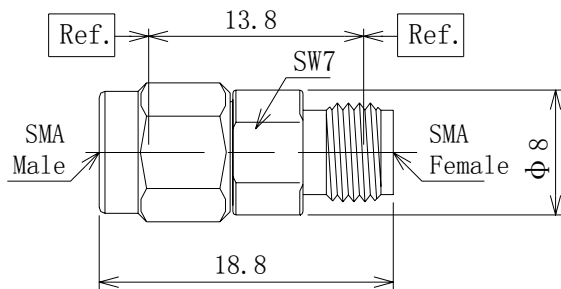

P/N	Z555510Z01
Description	SMA-SMA(JK)
VSWR	DC-27GHz...1.15:1(Max)

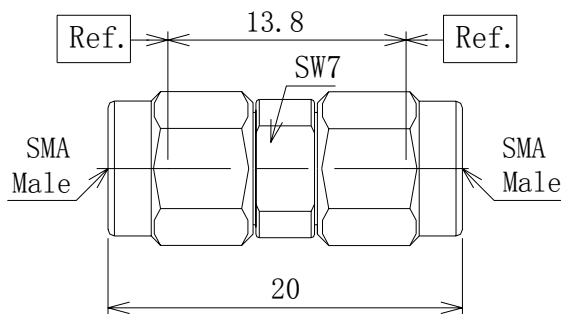

P/N	Z555511Z01
Description	SMA-SMA(JJ)
VSWR	DC-27GHz...1.15:1(Max)