

MTPA 4... 8GHz

Wideband GaN Amplifiers



STANDARD MODELS

Model	Frequency Range	Output Power	Input Power	Small Signal Gain	Gain Flatness	Gain Adj	Input VSWR
	GHZ	min / max / typ W	max dBm	min / typ dB	typ / max dB	max dB	typ / max
MTPA0408-10	4 ... 8	10/14/12	0	42/44	±2/±3	20	1.5/2
Model	Output VSWR	2nd Harmonic Power @ Pout	3rd Harmonic Power @ Pout	Spur @ Pout	IM3	Noise Floor	Stability
	typ / max	typ / max dBc	max dBc	typ / max dBc	typ / max dBc	typ / max dBm/MHz	yes / no
MTPA0408-10	2.5/3	-15/-10	-10	-65/-60	NA	-45/-40	Y
Model	VSWR Load	Line Power	Dimensions (H, D)	Weight			
		VA	19"-System	typ kg			
MTPA0408-10	3	100	2HU, 19"	6.5			

1 HU = 44.45 mm

STANDARD SPECIFICATIONS

Overdrive Protection:	up to +10 dBm for no damage
Input Impedance:	50 Ohm nominal
Output Impedance:	50 Ohm nominal
Noise Figure:	20 dB max.
Class of Operation:	AB-linear

GENERAL

RF Input:	SMA-f; standard on front panel
RF Output:	SMA-f; standard on front panel
Mains Supply:	<100 VA 200 ... 240 V AC
Power Meter:	via status display
Elapsed Time Meter:	via status display
Ambient Temperature:	0 ... +45 °C
Storage Temperature:	-20 ... +65 °C

MTPA 4... 8GHz


Wideband GaN Amplifiers



Relative Humidity: up to 95% (non-condensing)
Operating Altitude: up to 2000 m above sea level
Vibration and Shock: normal laboratory environment
Cooling: forced air with integral blower
air intake and exhaust at rear

OPTIONS

- A) Forward & Reverse Monitor
- B) External Dual Directional Coupler
- C) IEEE-488.2 GPIB Remote Control
- G) Output isolation
- L) LAN Remote control
- M) 220 V AC / 47 ... 63 Hz
- N) Harmonic Filter
- R) RS-232C Remote Control
- U) USB Remote Control

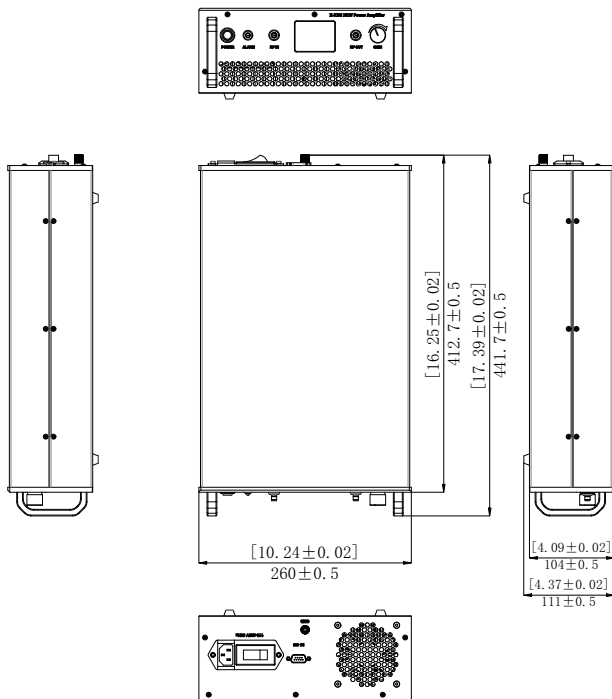

2HU