

MTPA 57... 63GHz

Wideband GaN Amplifiers



STANDARD MODELS

Model	Frequency Range GHz	Output Power min / max / typ W	Input Power max dBm	Small Signal Gain min / typ dB	Gain Flatness typ / max dB	Gain Adj max dB	Input VSWR typ / max
MTPA5763-1	57 ... 63	1/1.4/1.2	5	30/35	±2/±3	NA	2/2.5
Model	Output VSWR typ / max	2nd Harmonic Power @ Pout typ / max dBc	3rd Harmonic Power@ Pout max dBc	Spur @ Pout typ / max dBc	IM3 typ / max dBc	Noise Floor typ / max dBm/MHz	Stability yes / no
MTPA5763-1	2/3	-15/-10	-10	-65/-60	NA	-45/-40	Y
Model	VSWR Load	Line Power VA	Dimensions (H, D) 19"-System	Weight typ kg			
MTPA5763-1	3	50	2HU, 19"	6			

1 HU = 44.45 mm

STANDARD SPECIFICATIONS

Overdrive Protection: up to +10 dBm for no damage
 Input Impedance: 50 Ohm nominal
 Output Impedance: 50 Ohm nominal
 Noise Figure: 20 dB max.
 Class of Operation: AB-linear

GENERAL

RF Input: 1.85-f; standard on front panel
 1.85-f; standard on front panel
 RF Output: WR15
 Mains Supply: <50 VA 200 ... 240 V AC
 Power Meter: via statusdisplay
 Elapsed Time Meter: via statusdisplay
 Ambient Temperature: 0 ... +45 °C
 Storage Temperature: -20 ... +65 °C

MTPA 57... 63GHz


Wideband GaN Amplifiers



Relative Humidity: up to 95% (non-condensing)
Operating Altitude: up to 2000 m above sea level
Vibration and Shock: normal laboratory environment
Cooling: forced air with integral blower
air intake and exhaust at rear

OPTIONS

- A) Forward & Reverse Monitor
- B) External Dual Directional Coupler
- C) IEEE-488.2 GPIB Remote Control
- G) Output isolation
- L) LAN Remote control
- M) 115 V AC / 47 ... 63 Hz
- N) Harmonic Filter
- R) RS-232C Remote Control
- U) USB Remote Control

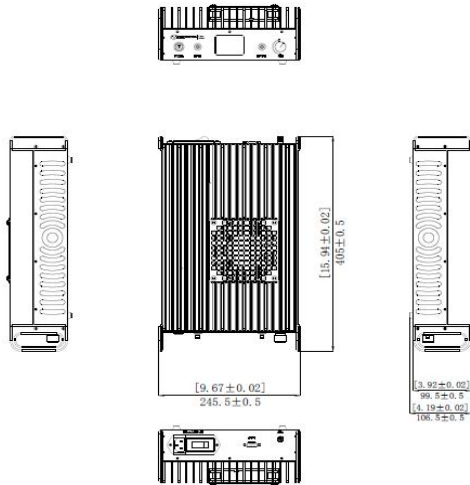

2HU

ACTUAL TESTING DATA