

MTPA 90... 110GHz

## Wideband GaN Amplifiers



### STANDARD MODELS

Model	Frequency Range GHz	Output Power min / max / typ W	Input Power max dBm	Small Signal Gain min / typ dB	Gain Flatness typ / max dB	Gain Adj max dB	Input VSWR typ / max
MTPA90110-1	90 ...110	1/1.2/1.1	5	30/35	±3/±4	NA	2/2.5
Model	Output VSWR typ / max	2nd Harmonic Power @ Pout typ / max dBc	3rd Harmonic Power@ Pout max dBc	Spur @ Pout typ / max dBc	IM3 typ / max dBc	Noise Floor typ / max dBm/MHz	Stability yes / no
MTPA90110-1	2/3	-15/-10	-10	-65/-60	NA	-45/-40	Y
Model	VSWR Load	Line Power VA	Dimensions (H, D) 19"-System	Weight typ kg			
MTPA90110-1	3	50	2HU 19"	6			

1 HU = 44.45 mm

### STANDARD SPECIFICATIONS

Overdrive Protection: up to +10 dBm for no damage  
 Input Impedance: 50 Ohm nominal  
 Output Impedance: 50 Ohm nominal  
 Noise Figure: 20 dB max.  
 Class of Operation: AB-linear

### GENERAL

RF Input: WR-10; standard on front panel  
 RF Output: WR-10; standard on front panel  
 Mains Supply: <50 VA 200 ... 240 V AC  
 Power Meter: via statusdisplay  
 Elapsed Time Meter: via statusdisplay  
 Ambient Temperature: 0 ... +45 °C  
 Storage Temperature: -20 ... +65 °C

MTPA 90... 110GHz


## Wideband GaN Amplifiers



Relative Humidity: up to 95% (non-condensing)  
Operating Altitude: up to 2000 m above sea level  
Vibration and Shock: normal laboratory environment  
Cooling: forced air with integral blower  
air intake and exhaust at rear

### OPTIONS

- A) Forward & Reverse Monitor
- B) External Dual Directional Coupler
- C) IEEE-488.2 GPIB Remote Control
- G) Output isolation
- L) LAN Remote control
- M) 115 V AC / 47 ... 63 Hz
- N) Harmonic Filter
- R) RS-232C Remote Control
- U) USB Remote Control

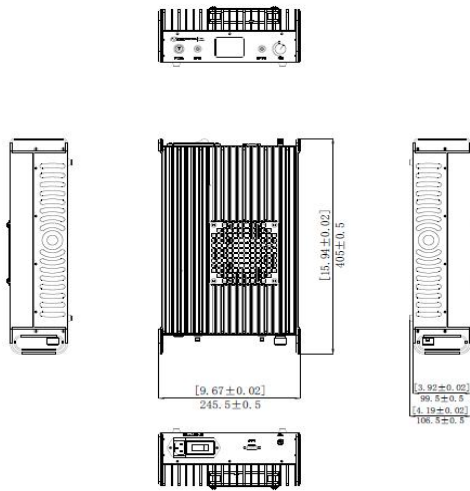

2HU

### ACTUAL TESTING DATA