

1 2 3 4 5 6

A


A

B

B


C

C

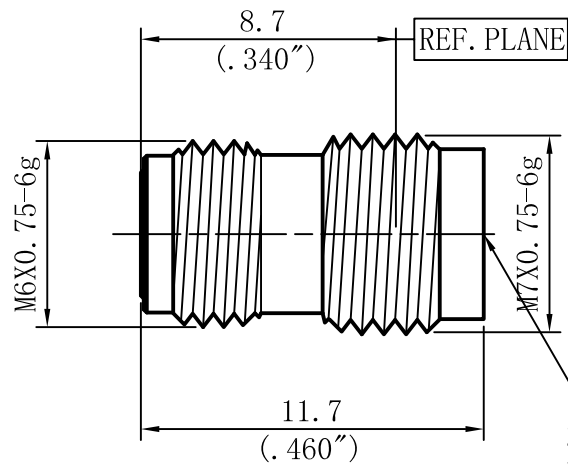

2.4mm
Female

SOCKET TO ACCEPT $\phi 0.23(.009)$ PIN
2(.079") MAX DEPTH



Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators:PEI

M MicrowaveTown Company, LLC
1283 E. Route 66 Ave.
Glendora, CA 91741
Tel:(626)241-9635
Fax:(626)698-1638
www.microwavetown.com

DIRECTION OF VIEW



UNIT

mm

TITLE

2.4mm Connector

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

DRAWN Shaoging Du

CHECKED Haimin Zhang

APPR. Gang Cao

DWG NO.

D370S09Y02

UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.1; ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓

OUTLINE DRAWING

| LTR | DESCRIPTION | DATE | APPR. |
|-----|-------------|------|-------|
| | | | |

DO NOT SCALE DRAWING

SIZE A4_h

SCALE 4: 1

REV. V2.0

SHEET 1/1

1 2 3 4 5 6