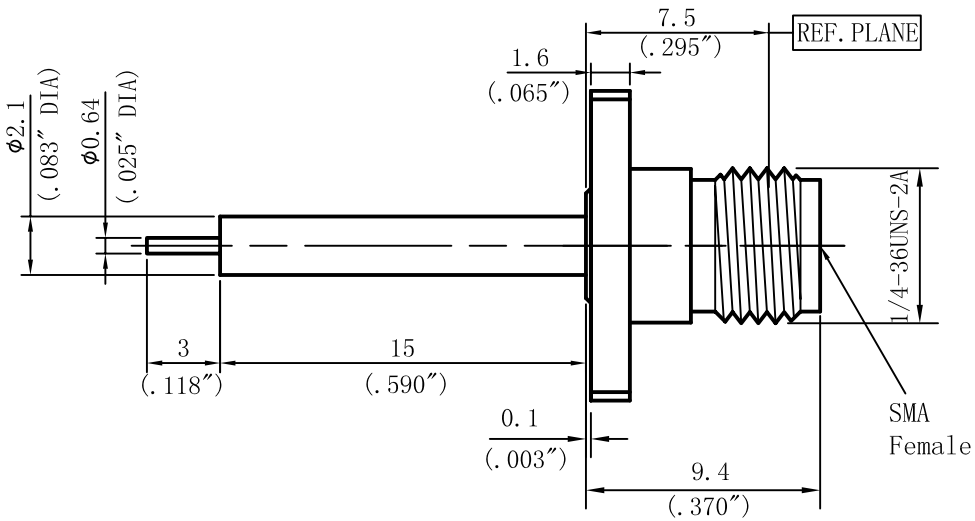

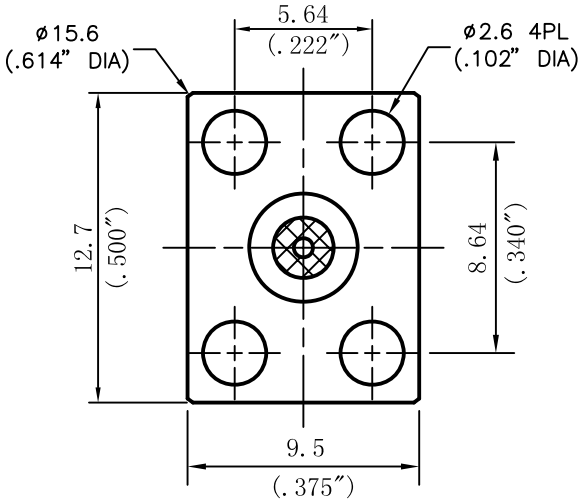

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz

Materials/Finishes:

Housing: SU303F
Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI

MicrowaveTown Company, LLC
1283 E. Route 66 Ave.
Glendora, CA 91741
Tel:(626)241-9635
Fax:(626)698-1638
www.microwavetown.com

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

LTR	DESCRIPTION	DATE	APPR.

DIRECTION OF VIEW

UNIT: mm

DRAWN	Xiaolu Yu
CHECKED	Shaoqing Du
APPR.	Gang Cao

UNLESS OTHERWISE SPECIFIDE
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.1. ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING. SURFACE FINISHED

DO NOT SCALE DRAWING

TITLE
SMA Connector

DWG NO.
D550P0304F03

OUTLINE DRAWING

SIZE A4_h | SCALE 4:1 | REV. V2.0 | SHEET 1/1