

MTPA 88... 100GHz

## Wideband GaN Amplifiers



### STANDARD MODELS

Model	Frequency Range GHz	Output Power min / max / typ W	Input Power max dBm	Small Signal Gain min / typ dB	Gain Flatness typ / max dB	Gain Adj max dB	Input VSWR typ / max
MTPA88100-1	88 ... 100	1/1.2/1.1	5	30/35	±3/±4	NA	2/2.5
Model	Output VSWR typ / max	2nd Harmonic Power @ Pout typ / max dBc	3rd Harmonic Power @ Pout max dBc	Spur @ Pout typ / max dBc	IM3 typ / max dBc	Noise Floor typ / max dBm/MHz	Stability yes / no
MTPA88100-1	2/3	-15/-10	-10	-65/-60	NA	-45/-40	Y
Model	VSWR Load	Line Power VA	Dimensions (H, D) 19"-System	Weight typ kg			
MTPA88100-1	3	50	2HU 19"	6			

1 HU = 44.45 mm

### STANDARD SPECIFICATIONS

Overdrive Protection:	up to +10 dBm for no damage
Input Impedance:	50 Ohm nominal
Output Impedance:	50 Ohm nominal
Noise Figure:	20 dB max.
Class of Operation:	AB-linear

### GENERAL

RF Input:	WR-10; standard on front panel
RF Output:	WR-10; standard on front panel
Mains Supply:	<50 VA      200 ... 240 V AC via status
Power Meter:	display via status
Elapsed Time Meter:	display
Ambient Temperature:	0 ... +45 °C
Storage Temperature:	-20 ... +65 °C

MTPA 88... 100GHz


## Wideband GaN Amplifiers



Relative Humidity: up to 95% (non-condensing)  
Operating Altitude: up to 2000 m above sea level  
Vibration and Shock: normal laboratory environment  
Cooling: forced air with integral blower  
air intake and exhaust at rear

### OPTIONS

- A) Forward & Reverse Monitor
- B) External Dual Directional Coupler
- C) IEEE-488.2 GPIB Remote Control
- G) Output isolation
- L) LAN Remote control
- M) 115 V AC / 47 ... 63 Hz
- N) Harmonic Filter
- R) RS-232C Remote Control
- U) USB Remote Control

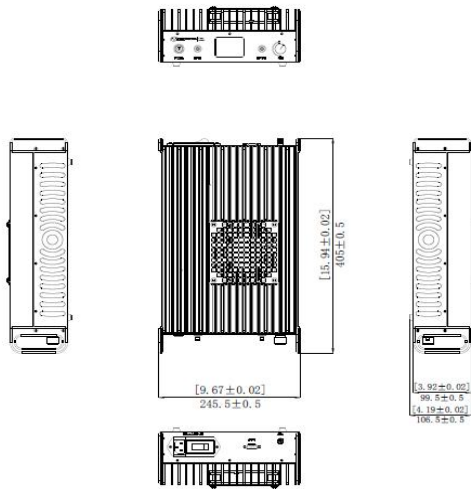

2HU

### ACTUAL TESTING DATA

