

1 2 3 4 5 6

A


A

B

B

C

C

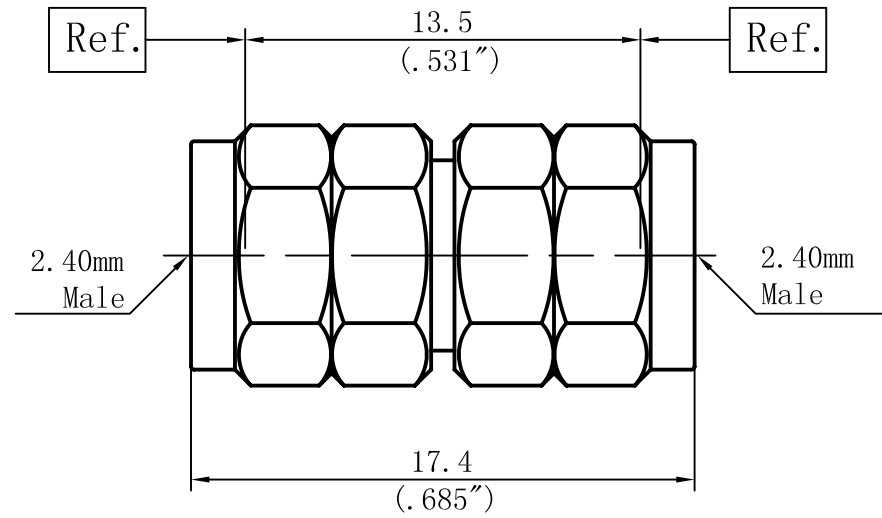

Performance Features:

Nominal Impedance: 50Ω
 Frequency Range: DC-50GHz
 VSWR: DC-50GHz... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
 Polished & Passivated
 Center Contact: Beryllium Copper
 Gold Plated
 Insulators: PEI

MicrowaveTown www.MicrowaveTown.com				DIRECTION OF VIEW 	UNIT mm	TITLE 2.4mm Adapter					
<small>PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN</small>				DRAWN Shaoqing Du	DWG NO.		Z373711Z01				
				CHECKED Haimin Zhang							
				APPR. Gang Cao			OUTLINE DRAWING				
				<small>UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ±0.1; ANGLE TOLERANCES ±1° 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓</small>							
LTR	DESCRIPTION	DATE	APPR.	DO NOT SCALE DRAWING		SIZE A4_h	SCALE 4: 1	REV. V2.0	SHEET 1/1		

1 2 3 4 5 6

D

D